



APP/TWR 118.5

ELEV AD 6033 FT
VAR 7° E

MORELIA
GRAL. FRANCISCO J. MUJICA
AEROPUERTO INTL / INTL AIRPORT

TA: 18500 FT

VOR/DME 1 RWY 23

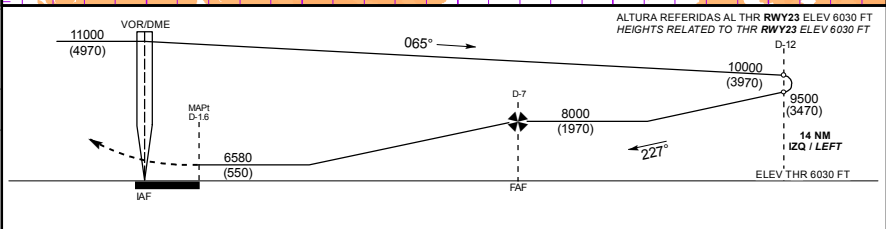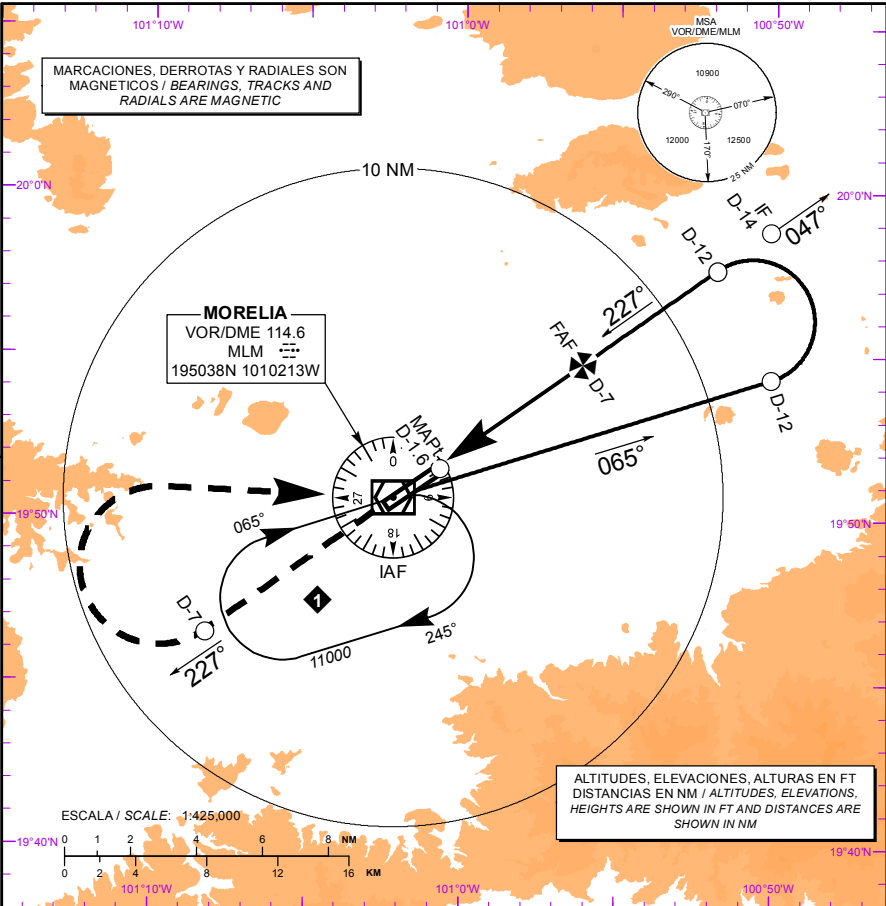

APROXIMACION FRUSTRADA / MISSED APPROACH

ASCIENDA EN RADIAL 227° HASTA D-7, EFECTUE VIRAJE DE
GOTAA LA DERECHA DENTRO DE 10 NM HACIA EL
VOR/DME/MLM HASTA LA ALTITUD MINIMA DE ESPERA.

CLIMB VIA MLM VOR R-227° TO D-7, THEN TURN RIGHT WITHIN
10 NM TO VOR/DME/MLM AT THE MINIMUM HOLDING ALTITUDE.

		GRADIENTE DE DESCENSO / RATE OF DESCENT						
FAF - MAPt	VEL GS (KTS)	80	100	120	140	160	180	200
5.4 NM	FT / NM	473	591	709	827	946	1064	1182
5.83%	MIN : SEC	4:03	3:14	2:42	2:19	2:02	1:48	1:37

ALTITUD MINIMA SEGUN DISTANCIA DME/MLM /
MINIMUM ALTITUDE ACCORDING TO DISTANCE DME/MLM

	NM	7	6	5	4	3
FT	8000 (1970)	7650 (1620)	7290 (1260)	6940 (910)	6580 (550)	

CAT	A	B	C	D
-				
DIRECTO / DIRECT MDA (MDH)	6580 (550) - 1 (1600 M)		6580 (550) - 1 1/2 (2400 M)	6580 (550) - 1 3/4 (2800M)
CIRCULANDO CIRCLING MDA (MDH)	6900 (867) - 1 (1600 M)	6900 (867) - 1 1/4 (2000 M)	7140 (1107) - 3 (4800 M)	

CAMBIO: FORMATO: SIMBOLOGIA: DESIGNADOR: HAA: MINIMOS: ELEV THR